


MAX-FRESH
HOT/COLD SYSTEMS

Model FT-1

Refrigerated Drop-In Frost Tops

Model

FT-1

FT-2

FT-3

FT-4

FT-5

FT-6

STANDARD FEATURES

- ☐ Self contained drop-in design
- ☐ Hold standard 18" by 26" sheet pans or ½ size pans
- ☐ Stainless steel top and liner for maximum strength and durability
- ☐ 1" drain for ease of cleaning
- ☐ On-off switch with 8 ft. cord & plug for ease of installation and operation
- ☐ Type 134A or 404A CFC free refrigerants
- ☐ Fully insulated, CFC free, foamed-in place for energy savings
- ☐ Quick & easy service with sight glass, service valves, filter/dryer and receiver
- ☐ Limited 1 year parts & labor warranty

OPTIONS & ACCESSORIES

- ☐ Remote on/off switch
- ☐ 220/230/240V
- ☐ 50 cycle
- ☐ Remote models with or without condensing units

DESCRIPTION

USECO Refrigerated Drop-In Frost Tops are designed to keep pre-chilled food and beverage products at cold, fresh serving temperatures. All models are completely self-contained. Each section holds a full-size sheet pan and is available from one –to six size pan models, are CFC free and include an 8 ft. 120V cord and plug.

SPECIFICATIONS

Top– Die-stamped stainless steel construction with a 1" drain for ease of cleaning. It can accommodate half and full size sheet pans. Features adjustable temperature controls.


Interior – CFC free insulation on side and bottom. Condensing unit mounted on corrosion resistant frame below the cold pan.

Refrigeration – Refrigeration coils are attached to the underside of the frost top for maximum efficiency and cooling. Air cooled CFC-free refrigerant system features self-contained condenser and sealed compressor and an on/off switch with 8 ft. cord and plug set. Refrigeration system features sight glass, easy service valves, dryer/filter and receiver.



Model FT-4

shown below

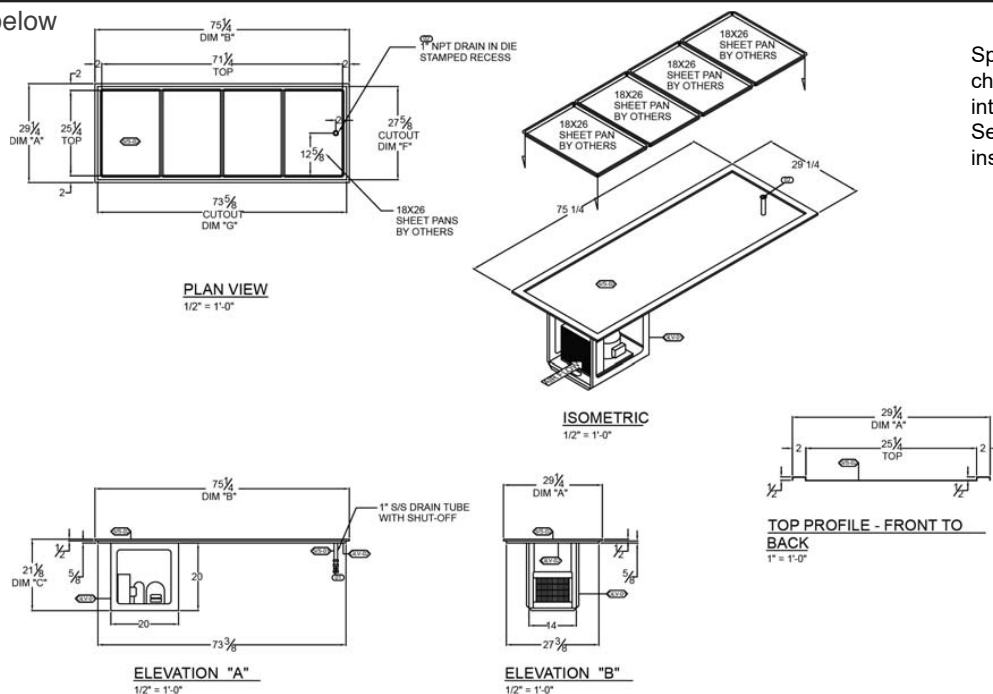

Specifications are subject to change without notice and are not intended for installation purposes. See installations instructions prior to installing the unit.

SPECIFICATIONS

Model Number	OVERALL DIMENSIONS			INTERIOR DIMENSIONS		CUT OUT DIMENSIONS	
	A Front to Back Inches (MM)	B Left to Right Inches (MM)	C Height Inches (MM)	D Front to Back Inches (MM)	E Left to Right Inches (MM)	F Front to Back Inches (MM)	G Left to Right Inches (MM)
FT-1	29-1/4 (743)	21-1/4 (540)	21-1/8 (537)	25-1/4 (641)	17-1/4 (438)	27-5/8 (702)	19-5/8 (498)
FT-2	29-1/4 (743)	39-1/4 (997)	21-1/8 (537)	25-1/4 (641)	35-1/4 (895)	27-5/8 (702)	37-5/8 (956)
FT-3	29-1/4 (743)	57-1/4 (1454)	21-1/8 (537)	25-1/4 (641)	53-1/4 (1353)	27-5/8 (702)	55-5/8 (1413)
FT-4	29-1/4 (743)	75-1/4 (1911)	21-1/8 (537)	25-1/4 (641)	71-1/4 (1810)	27-5/8 (702)	73-5/8 (1870)
FT-5	29-1/4 (743)	93-1/4 (2369)	21-1/8 (537)	25-1/4 (641)	89-1/4 (2267)	27-5/8 (702)	91-5/8 (2327)
FT-6	29-1/4 (743)	111-1/4 (2826)	21-1/8 (537)	25-1/4 (641)	107-1/4 (2724)	27-5/8 (702)	109-5/8 (2784)

SHIPPING INFORMATION

Model Number	WEIGHTS		CARTON DIMENSIONS			CRATE SIZE	
	SHIPPING WEIGHT POUNDS (KG)	INSTALLED WEIGHT POUNDS (KG)	WIDTH Inches (MM)	DEPTH Inches (MM)	HEIGHT Inches (MM)	CUBIC FEET	CUBIC METERS
FT-1	103 (47)	88 (40)	22-3/4 (578)	30-7/8 (784)	23-5/8 (600)	9.6	0.27
FT-2	125 (57)	97 (44)	40-3/4 (1035)	30-7/8 (784)	23-5/8 (600)	17.2	0.48
FT-3	140 (64)	108 (49)	58-3/4 (1492)	30-7/8 (784)	23-5/8 (600)	24.8	0.7
FT-4	155 (70)	119 (54)	76-3/4 (1949)	30-7/8 (784)	23-5/8 (600)	32.4	0.91
FT-5	170 (77)	130 (59)	94-3/4 (2407)	30-7/8 (784)	23-5/8 (600)	40	1.13
FT-6	187 (83)	141 (64)	112-3/4 (2864)	30-7/8 (784)	23-5/8 (600)	47.6	1.34

POWER SUPPLY

Model Number	VOLTS	HP	AMPS	PHASE	POWER SUPPLY	Refrigerant
FT-1	115	1/4	4.9	SINGLE	NEMA 5-15P	134A
FT-2	115	1/4	4.9	SINGLE	NEMA 5-15P	134A
FT-3	115	1/3	5.6	SINGLE	NEMA 5-15P	404A
FT-4	115	1/2	6.4	SINGLE	NEMA 5-15P	404A
FT-5	115	3/4	15.2	SINGLE	NEMA 5-20P	404A
FT-6	115	3/4	15.2	SINGLE	NEMA 5-20P	404A