


**Model RTS4**

## Refrigerated Topping Server

### Model

RTS4

### STANDARD FEATURES

- Self-Contained Refrigeration System with 1/6th HP compressor and R-134 refrigerant
- NSF-7 Compliant @ 35° F (1.7° C) product temperature
- Operator adjustable temperature controls with digital readout
- Lighted on / off power switch
- Includes 4-each removable 1/6-size, 6" deep, clear polycarbonate inset pans with hinged lids
- Safely accommodates 2" deep, 4" deep or 6" deep inset pans
- Accommodates equivalent 2/3rd-size, 1/3rd-size, 1/6th-size or 1/9th-size pans
- Includes adaptor bar to support fractional pans
- Pans are easily removable for ease of cleaning
- Heavy gauge Stainless steel front, top and sides
- CFC-free foamed in place insulation
- 120V, 60HZ with 4' (1.22 M) cord set and NEMA 5-15P plug
- Includes 4 each 1/2" rubber feet
- One-Year limited Part & Labor warranty

### OPTIONS & ACCESSORIES

- Extended 5-Year compressor warranty

### DESCRIPTION

USECO's Refrigerated Toppings Server RTS4 is designed to hold toppings, condiments and similar foods at fresh & safe NSF-7 temperatures. It is completely self-contained, quiet and compact.

### SPECIFICATIONS


**Exterior/Interior** – All heavy gauge stainless exterior featuring 4 each 1/6th-size, 6" deep, clear, polycarbonate inset pans with hinged flip-lids & stainless adaptor bar. Inset pans are removable for easy cleaning. Four each 1/2" rubber feet are standard. All stainless interior is standard with CFC-free foamed in place insulation throughout. Features include a 4' (1.22 M) cord set with NEMA 5-15P plug and a Lighted on / off power switch.

**Refrigeration** – Cold Well refrigeration system features a 1/6th-size compressor with CFC-free R-134A refrigerant. RTS4 is NSF-7 Compliant @ 35° F (1.7° C) product temperature and includes an operator adjustable temperature controls with digital readout. Unit operates on 120V, 60HZ power



## Model RTS4


shown below

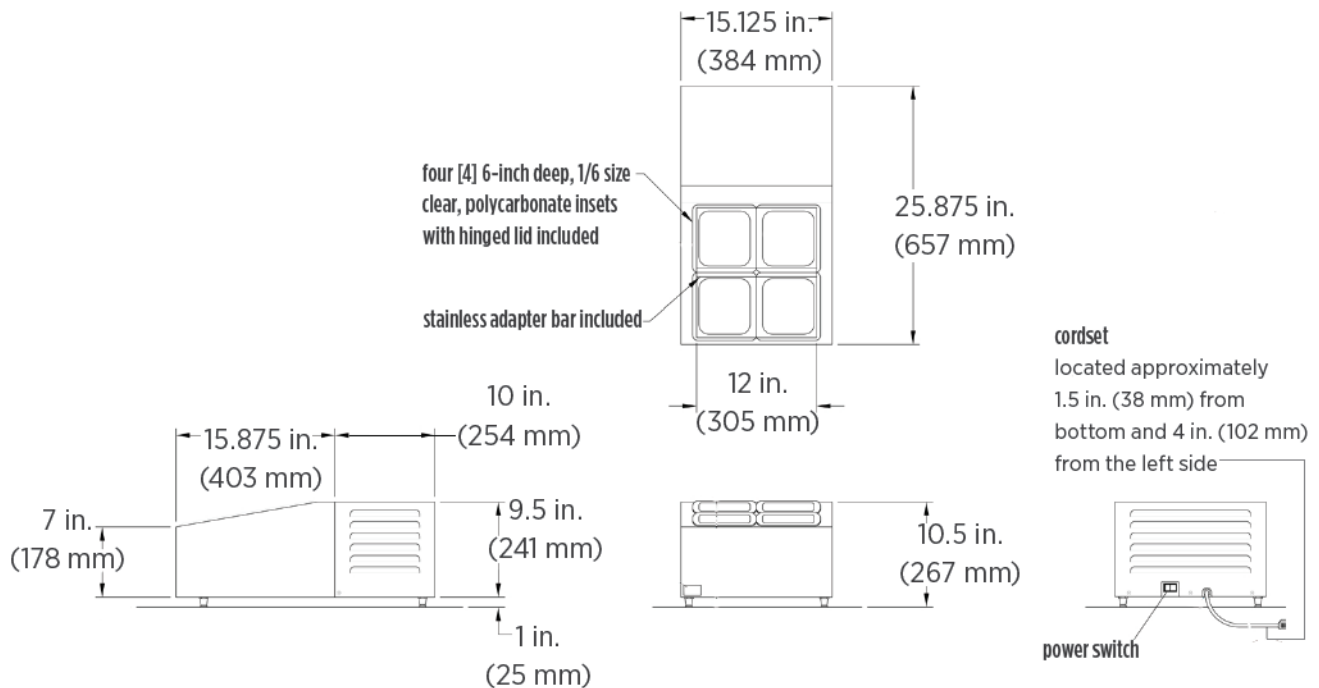

### CLEARANCES

These units can be installed on non-combustible countertops using the provided feet. The bottom, back, and both sides must be at least one [1] inch (25 mm) from any combustible surface.

MODEL	OPENING SIZE in. (mm)	HEIGHT in. (mm)	WIDTH in. (mm)	DEPTH in. (mm)	VOLTS	COMPRESSOR HP	AMPS	NEMA PLUG	APPROX. SHIP WEIGHT	APPROX. INSTALLED WEIGHT
RTS-4	12 x 13 1/8 (305 x 351)	10.5 (267)	15.125 (384)	25.875 (657)	120	1/6	2	5-15P	70 lb. (33.6 kg)	60 lb. (27.2 kg)



### VARIOUS OTHER PAN ARRANGEMENTS

(PANS BY OTHERS)